

T10 ESSENCE


Agglomerated cork underlayment for impact noise and thermal insulation

PRODUCT SPECIFICATION

Resilient acoustic underlayment made of agglomerated cork with PU (polyurethane) elastomer bonding agent for impact noise insulation of different types of flooring, with a density up to 280kg/m³.

KEY FEATURES

- ▶ Homogeneous material produced almost 100% from cork
- ▶ High durability and long term resilience
- ▶ Versatile material with reduced thickness
- ▶ Low residual indentation and negative carbon balance

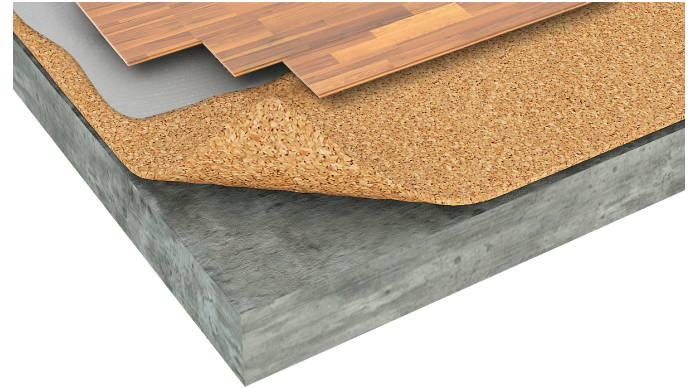

PHYSICAL AND MECHANICAL PROPERTIES

Specific Weight (kg/m ³ lb/ft ³) ①	160-280 10-18
Tensile Strength (kPa) ①	>200
Compression at 0.7MPa (%) ①	20-45
Recovery after 0.7MPa (%) ①	> 60

① ISO 7322

TECHNICAL PROPERTIES

Flooring		Laminates	
Thickness	mm	2.0	2.0
Thermal Resistance (TR) ①	m ² .°C/W	0.039	0.039
Floor Durability			
Punctual Conformability (PC) ①	mm	1.3	1.3
Compressive Strength (CS) ①	kPa	>200	>200
Compressive Creep (CC) ①	kPa	>100	>100
Water Vapor Resistance (SD) ①	m	NA	> 75
Vapor Barrier		○	●


① EN 16354 TBD To be determined NA Not applicable ● Yes ○ No

ACOUSTIC RESULTS


Flooring	Laminate			Wood	
Flooring Thickness	mm	8	8	8	14
Underlayment Thickness	mm	2	2	3	2
Impact Insulation (IS) ^①	dB (ISO)	17	—	17	—
Impact Insulation IIC Δ IIC ^②	dB (ASTM)	— —	74 38	— —	73 40
Sound Transmission (STC) ^③	dB (ASTM)	—	69	—	71
System (Glued Floating)		Floating	Floating	Floating	Floating
System (Ceiling)		○	●	○	●

① Standard ISO 717-2:2013 ② Standard ASTM E413 ③ Standard ASTM E989-89 ● Yes ○ No


Impact Sound (IS) · Laminate floor (8mm)
· T10 (2mm) · Floating

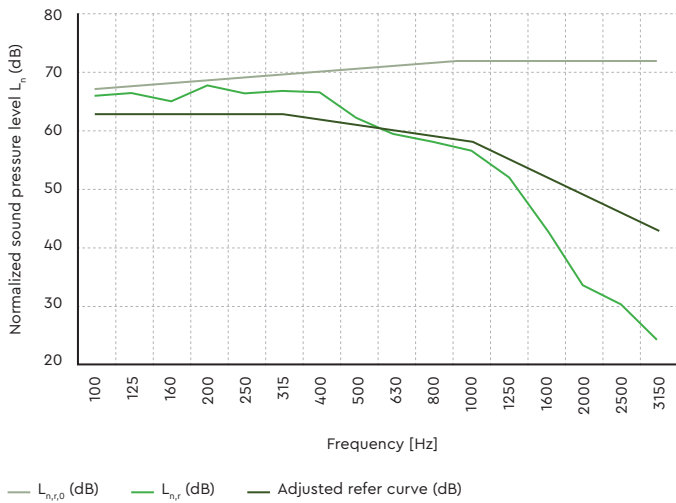


Impact Sound (IS) · Laminate floor (8mm)
· T10 (3mm) · Floating

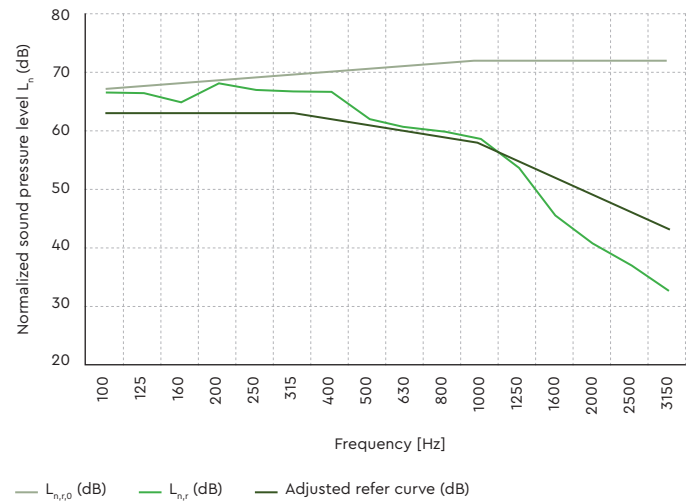

Impact Insulation Class (IIC) · Laminate floor (8mm)
· T10 (2mm) · Floating & Ceiling

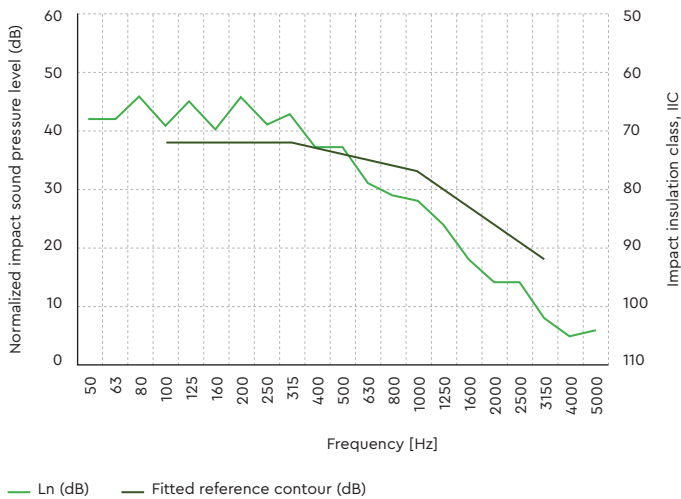


Delta Impact insulation class (Δ IIC) · Laminate floor (8mm)
· T10 (2mm) · Floating & Ceiling

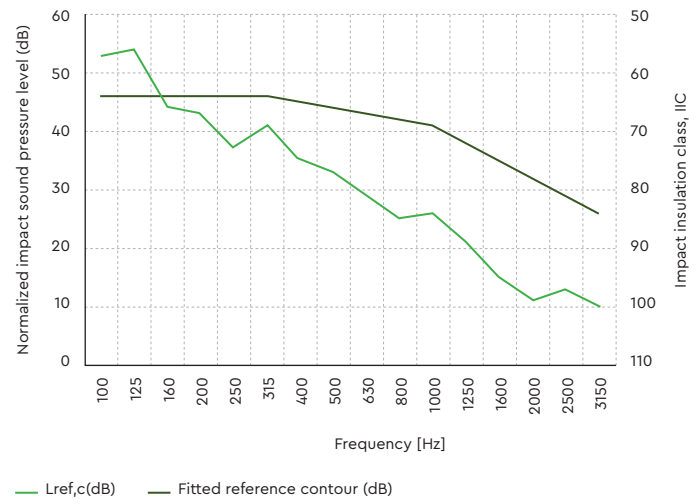


ACOUSTIC RESULTS


Sound transmission class (STC) · Laminate floor (8mm)
· T10 (2mm) · Floating & Ceiling

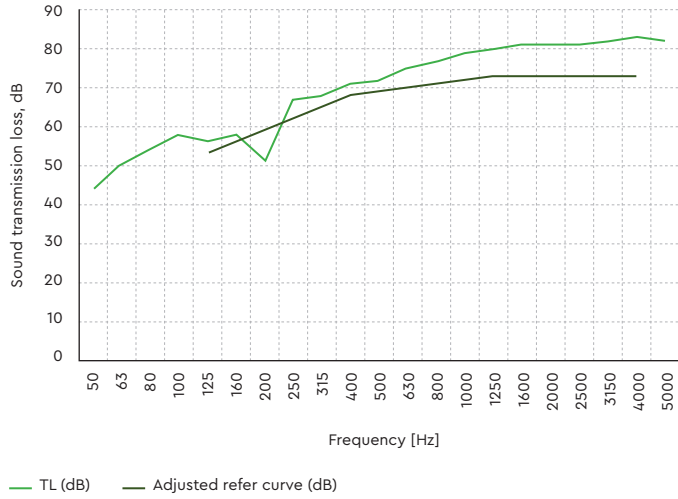


Impact Insulation Class (IIC) · Wood floor (14mm)
· T10 (2mm) · Floating & Ceiling

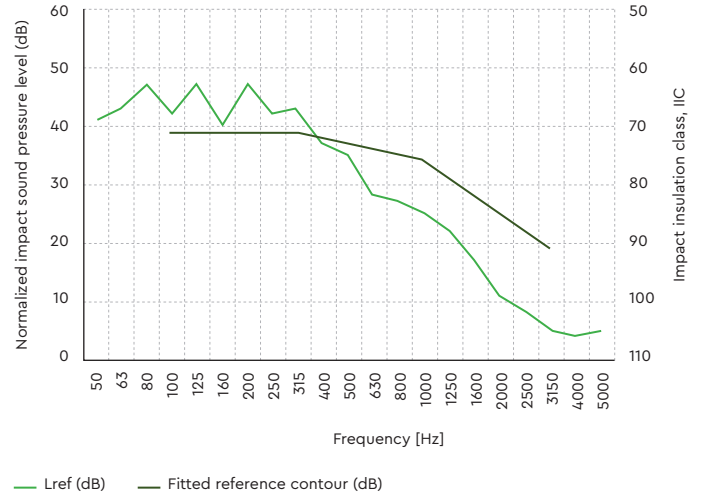


Delta Impact insulation class (Δ IIC) · Wood floor (14mm)
· T10 (2mm) · Floating & Ceiling

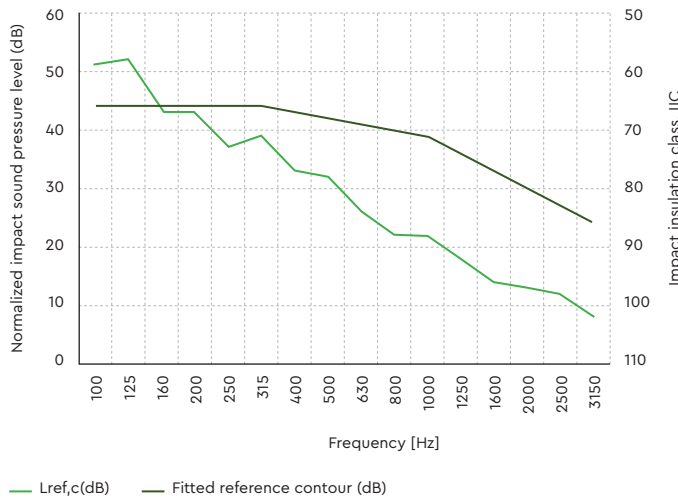

Sound transmission class (STC) · Wood floor (14mm)
· T10 (2mm) · Floating & Ceiling

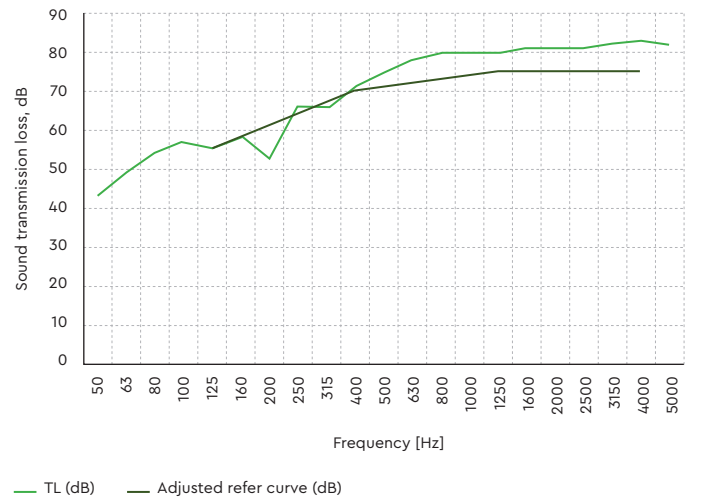


TEST APPARATUS (ΔL_w)

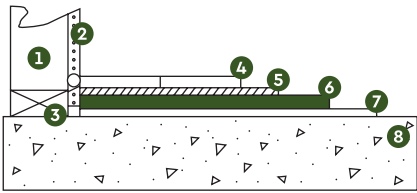

- 1 Wall
- 2 Wall board
- 3 Perimeter isolation barrier (optional)
- 4 Laminates
- 5 Adhesive (recommended flooring producer)
- 6 Acousticork T10
- 7 Adhesive (recommended flooring producer)
- 8 Subfloor concrete slab

INSTALLATION

NON GLUED FLOORS

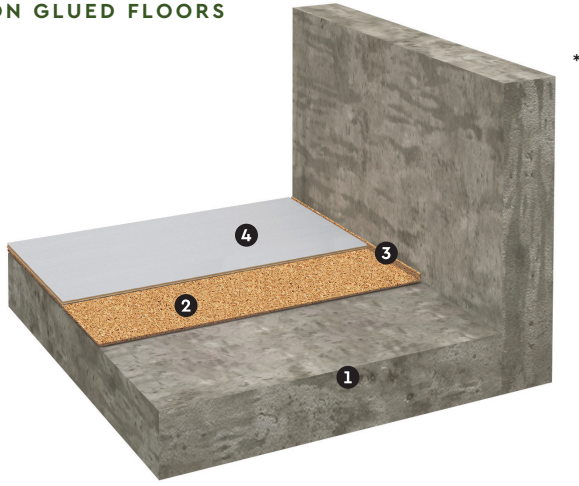

- 1 Reinforced concrete slab
- 2 Agglomerated cork resilient layer – Acousticork T10
- 3 Perimeter insulation barrier (optional)
- 4 Floor covering composed by non glued wood floor

*Product images and illustrations are for illustrative purposes only.

GENERAL INSTALLATION INSTRUCTIONS

The following installation instructions are recommended by Amorim Cork Solutions, but are not intended as a definitive project specification. They are presented in an attempt to be used with recommended installation procedures of the flooring installer.

Final Flooring

Always follow manufacturers recommended installation instructions, particularly when adhesives are recommended.

Recommended Adhesives

Wood-based floor to Acousticork: Water-Based Emulsion/ Polyurethane Glue;


Important Notes

Never mechanically fasten the Acousticork T10 to the flooring floor as this will severely diminish its acoustical value.



For more detailed installation instructions, please contact us.

Never install a wood or laminate floor without vapor barrier (integrated or applied before the underlayment).



APPLICATION PROCESS · GLUED FLOOR





These are all the materials needed to install the underlayment.




For the installation process, open the packaging 48 hours in advance and leave for acclimatization




Subfloor preparation: Make sure that the subfloor is leveled, dry, clean and in good structural conditions.




New concrete slabs must be left to cure for 120 days before installation.




The humidity content of the substrate is critical: it must not exceed 2.5% (MC).




Air temperature should be above 10°C and air humidity below 75%.




Optional step: apply the glue using a trowel. The installation of a moisture barrier is not necessary.




Optional step: we recommend the use of an adequate glue for the flooring to be installed.




Install the underlayment directly on the adhesive, leave a space between the wall and the underlayment.




The underlayment should be installed in a perpendicular direction that you plan to install the final floor.




The underlay must cover the entire area without any gaps nor overlaps.




Use the paint roller to make sure the underlayment doesn't have any waves.




Never mechanically secure the underlayment with screws, nails or staples, since this may undermine its effectiveness.




Apply the same glue on the underlayment.



Install the flooring in a perpendicular direction to the underlayment, and let the whole floor dry completely before you start to use it.



Always follow the flooring manufacturer's recommended installation instructions.



Total System.

TECHNICAL DATA SHEET T10 ESSENCE

The data provided in this Technical Data Sheet represents typical values. This information is not intended to be used as a purchasing specification and does not imply suitability for use in a specific application. Failure to select the proper product may result in either equipments damage or personal injury. Please contact Amorim Cork Solutions regarding specific application recommendations. Amorim Cork Solutions expressly disclaims all warranties, including any implied warranties or merchantability or of fitness for a particular purpose. Amorim Cork Solutions is not liable for any indirect special, incidental, consequential, or punitive damages as a result of using the information listed in this TDS. Any of its material specification sheets, its products or any future use or re-use of them by any person or entity. For contractual purposes, please request our Product Specifications Sheet (PDA).